



Lighting Animation Sign Controls

Made in U S A



DANCING STUDIO

Animation



Flasher



Marquee

Directional lights



*"We are in control"*

*Digital lighting systems, Inc*

*Info@digitallighting.com*

Phone: 305-969-8442

*Digitallighting.com*





**CHASER4** Chaser Lighting Controller, 1 chase pattern ( 1 ON , 3 OFF) variable speed  
 User selectable 4, 3 or 2 Circuit ( 4, 3 or 2 Point ) Electronic Light Chaser & flasher

The **CHASER4** is a user selectable 4, 3 or 2 points solid-state lighting chaser / Flasher, available in different models for driving 120, or 220 VAC loads. It is ideal for limited budget applications requiring simple Light chase sequences. "Single-Lamp Chase 1-On/3-Off combination" .

The Speed Rate control is easily accessible from the front panel. The CHASER4 Lighting Chasers are very compact in size and can be directly installed on top of a standard 2-gang electric wall box. In contrast with electro mechanical units, they are competitively priced and will provide years of trouble-free operation. The line-voltage models are capable of driving incandescent, cold-cathode neon, and magnetic step-down transformers.

CHASER4 Light chasers could be used for Marquee signs, store signs, decorative displays, Neon or LED signs, etc..or could be set to 2 channels and used as a simple ON/OFF flasher for 2 channel traffic warning , school zones or 1 light ON/OFF.

### Main Features

Adjustable Chase Rate.  
 All solid-state top rated components.  
 Uses 25 Amps output Triacs ( load rated at 20% )  
 User selectable, 2,3 or 4 channel sequences.  
 Built in circuit protection to prevent Voltage DC components. Protects Neon and other primary switched transformers.  
 Open frame Aluminum face plate  
 Output Ratings  
 Single-Lamp Chase (1-On/3-Off): 4 x 5 A. Outputs,  
 2400 Watts total @ 120 VAC operation.  
 Internal Fuse Protection.  
 Screw-terminal for Quick Installation.


### Mechanical Specifications

Aluminum Plate 4.8" x 4.8" x 1.75".  
 Compatible With 2-Gang, deep, Wall Box  
 (Not Supplied )

### Ordering and Pricing Information

**CHASER4-120**, 4 x 5 A. at 120 VAC. \$135  
**CHASER4-220**, 4 x 5 A. at 220-240 VAC. \$135

**TWO year limited factory warranty**

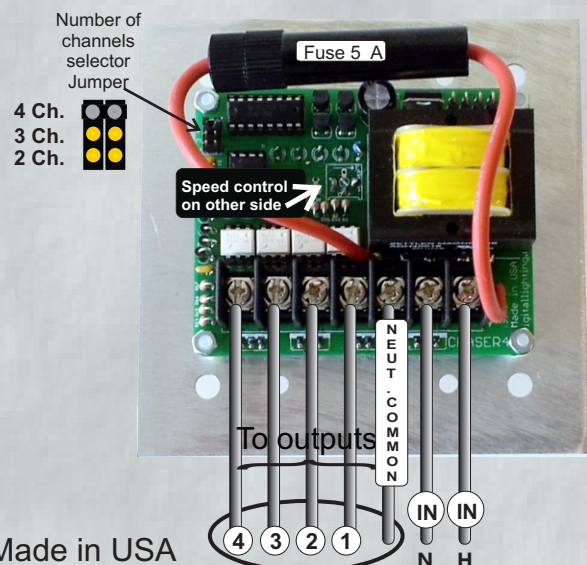

Made in USA