



# PD404 Typical 120 VAC or 220 VAC Wiring.

1x20 A - 120  
or 220 VAC  
Breaker

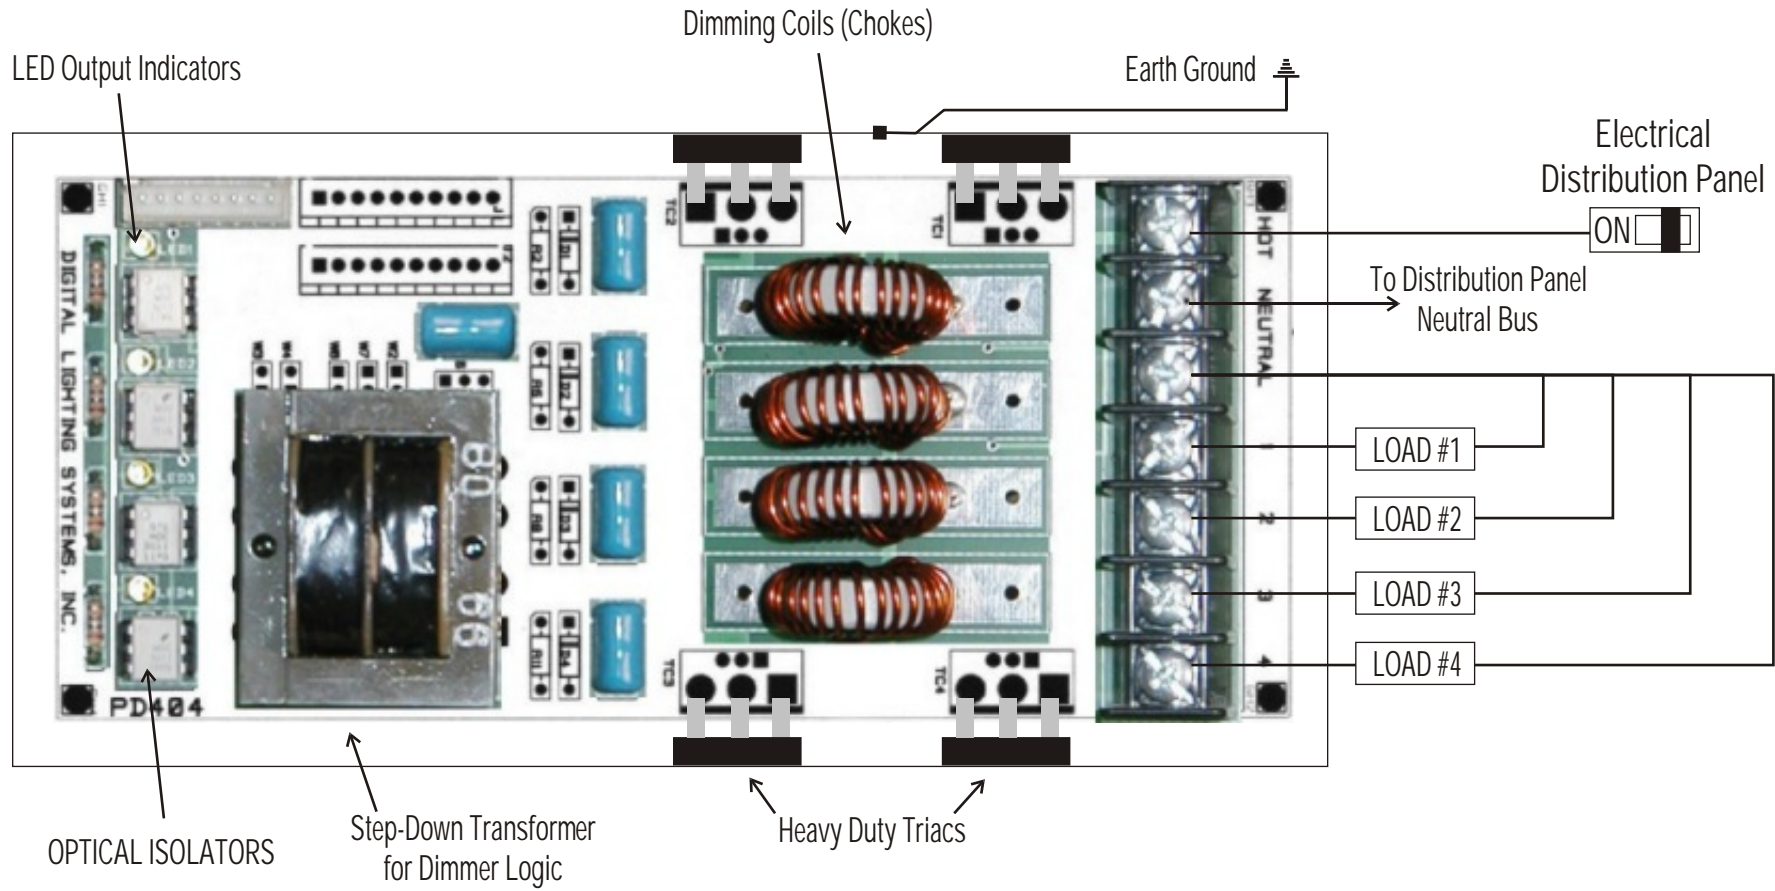

For Full Load Operation Use:  
 #12 AWG copper conductor wire for Line & Neutral Feeds.  
 #14 AWG copper conductors in/out to each load.  
 Max. Load: 4 Amperes (480W at 120 VAC, 880W at 220VAC) per output.

 <b>Digital Lighting Systems</b> - Miami, Florida Tel: (305) 264-8391, Web: www.digitallighting.com			Description PD404 SCHEMATICS FOR WIRING			
Date	Drawn By	Approved By	Part No.	Scale	Drawing No.	Revision
11-22-02	SAS	EMK		NTS		
			Sheet	Of	PD404-120/220-WRG	
			1	1		